


PLAN

N.T.S.

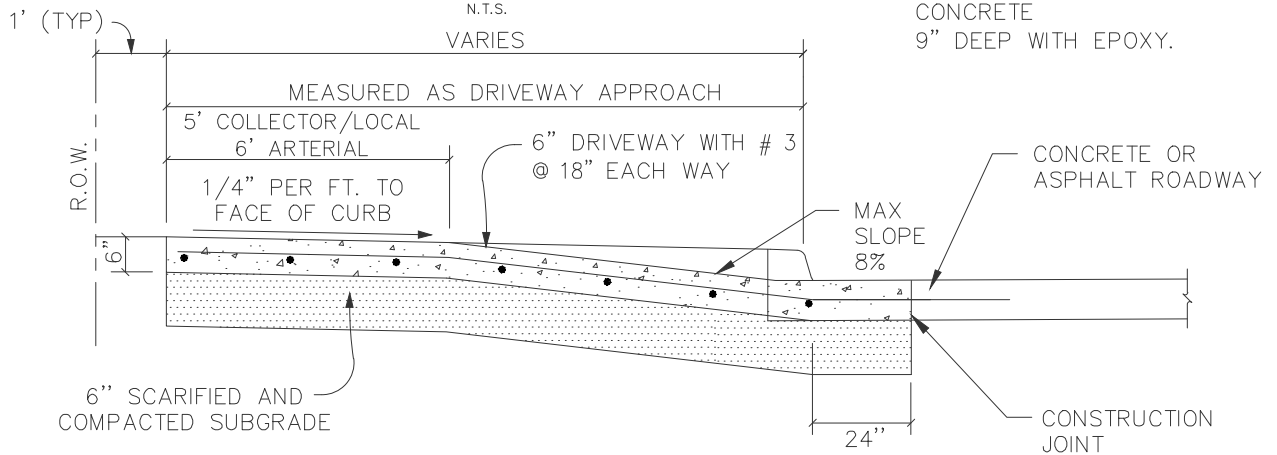

SECTION A-A

N.T.S.

NOTES:

1. MACHINE FINISHED CONCRETE SHALL HAVE A MAXIMUM SLUMP OF 4 INCHES AND A MIN. 3600 PSI COMPRESSIVE STRENGTH AT 28 DAYS, WITH UP TO 20% TYPE C FLY ASH REPLACEMENT ALLOWED.
2. HAND FINISHED CONCRETE SHALL HAVE A MAXIMUM SLUMP OF 5 INCHES AND A MIN. 3600 PSI COMPRESSIVE STRENGTH AT 28 DAYS. NO FLY ASH ALLOWED IN HAND FINISHED CONCRETE.
3. CONCRETE TO BE PLACED WITHIN 72 HOURS FROM THE TIME THE CURB & GUTTER IS SAWCUT.
4. SIDEWALK SECTION THRU DRIVEWAY SHALL BE POURED SAME THICKNESS AS DRIVEWAY APPROACH AND CONNECTED INTO ADJACENT SIDEWALK WITH 3/4" EXPANSION JOINT (#4 DOWEL BARS)
5. IF DRIVEWAY IS ON ASPHALT PAVED STREET, SAWCUT OUT EXISTING CURB AND GUTTER AND REPLACE INTEGRALLY WITH DRIVEWAY.



PAVING CONSTRUCTION DETAILS
STANDARD RESIDENTIAL DRIVEWAY APPROACH

REVISION DATE:
2/1/2024

SHEET: P-11