


PLAN
N.T.S.

6" FOR LOCAL STREETS
7" FOR COLLECTOR STREETS
8" FOR ARTERIAL STREETS

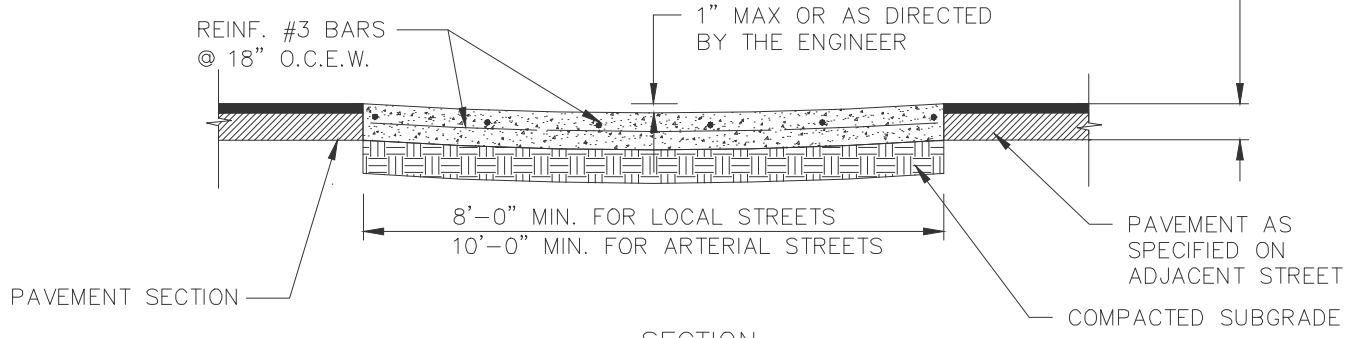

SECTION
N.T.S.

CROWN TRANSITION FOR CONCRETE VALLEY			
DISTANCE ALONG \bar{C} OF VALLEY	CROWN		
	6"	7"	8"
0'	0.000'	0.000'	0.000'
5'	0.167'	0.167'	0.167'
10'	0.290'	0.290'	0.290'
20'	0.445'	0.445'	0.465'
30'	0.500'	0.540'	0.580'
40'	0.500'	0.583'	0.635'
50'	0.500'	0.583'	0.667'

- NOTE:
1. MACHINE FINISHED CONCRETE SHALL HAVE A MAXIMUM SLUMP OF 4 INCHES AND A MIN. 3600 PSI COMPRESSIVE STRENGTH AT 28 DAYS, WITH UP TO 20% TYPE C FLY ASH REPLACEMENT ALLOWED
 2. HAND FINISHED CONCRETE SHALL HAVE A MAXIMUM SLUMP OF 5 INCHES AND A MIN. 3600 PSI COMPRESSIVE STRENGTH AT 28 DAYS. NO FLY ASH ALLOWED IN HAND FINISHED CONCRETE.



PAVING CONSTRUCTION DETAILS
CONCRETE VALLEY GUTTER

REVISION DATE:
2/1/2024

SHEET: P-10