



	WIDTH	RADIUS
ONE-WAY DRIVEWAY	15'	10'
TWO-WAY DRIVEWAY	30'	15'

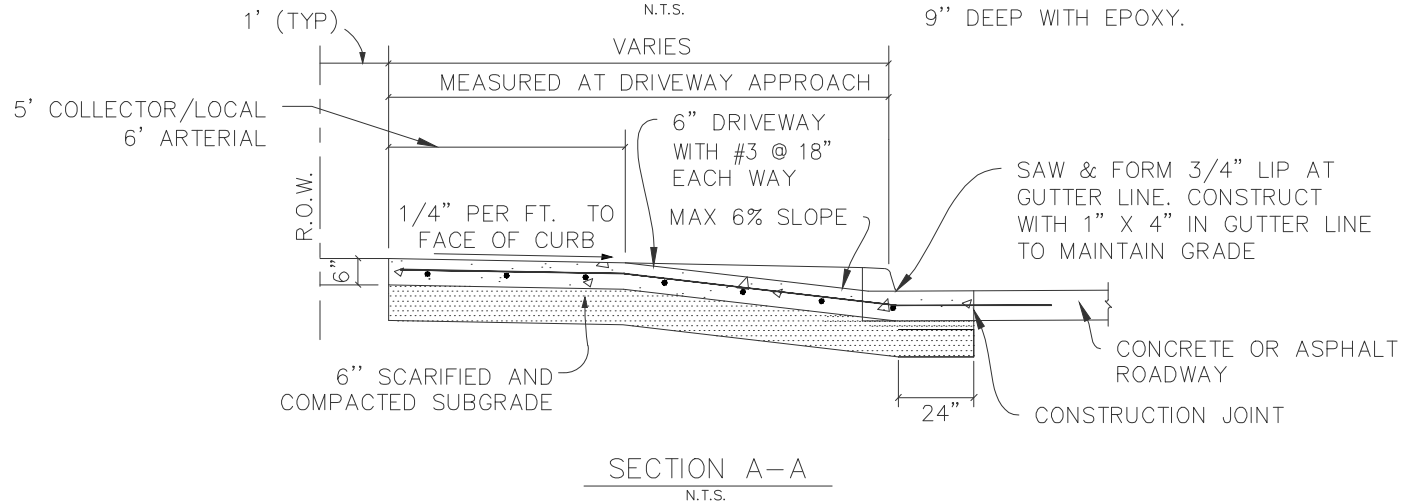

NOTES:

1. MACHINE FINISHED CONCRETE SHALL HAVE A MAXIMUM SLUMP OF 4 INCHES AND A MIN. 3600 PSI COMPRESSIVE STRENGTH AT 28 DAYS, WITH UP TO 20% TYPE C FLY ASH REPLACEMENT ALLOWED.
2. HAND FINISHED CONCRETE SHALL HAVE A MAXIMUM SLUMP OF 5 INCHES AND A MIN. 3600 PSI COMPRESSIVE STRENGTH AT 28 DAYS. NO FLY ASH ALLOWED IN HAND FINISHED CONCRETE.
3. CONCRETE TO BE PLACED WITHIN 72 HOURS FROM THE TIME THE CURB & GUTTER IS SAWCUT.
4. IF DRIVEWAY IS ON ASPHALT PAVED STREET, SAWCUT OUT EXISTING CURB AND GUTTER AND REPLACE INTEGRALLY WITH DRIVEWAY.
5. SIDEWALK SECTION THRU DRIVEWAY SHALL BE POURED SAME THICKNESS AS DRIVEWAY APPROACH AND CONNECTED INTO ADJACENT SIDEWALK WITH 3/4" EXPANSION JOINT (#4 DOWEL BARS)

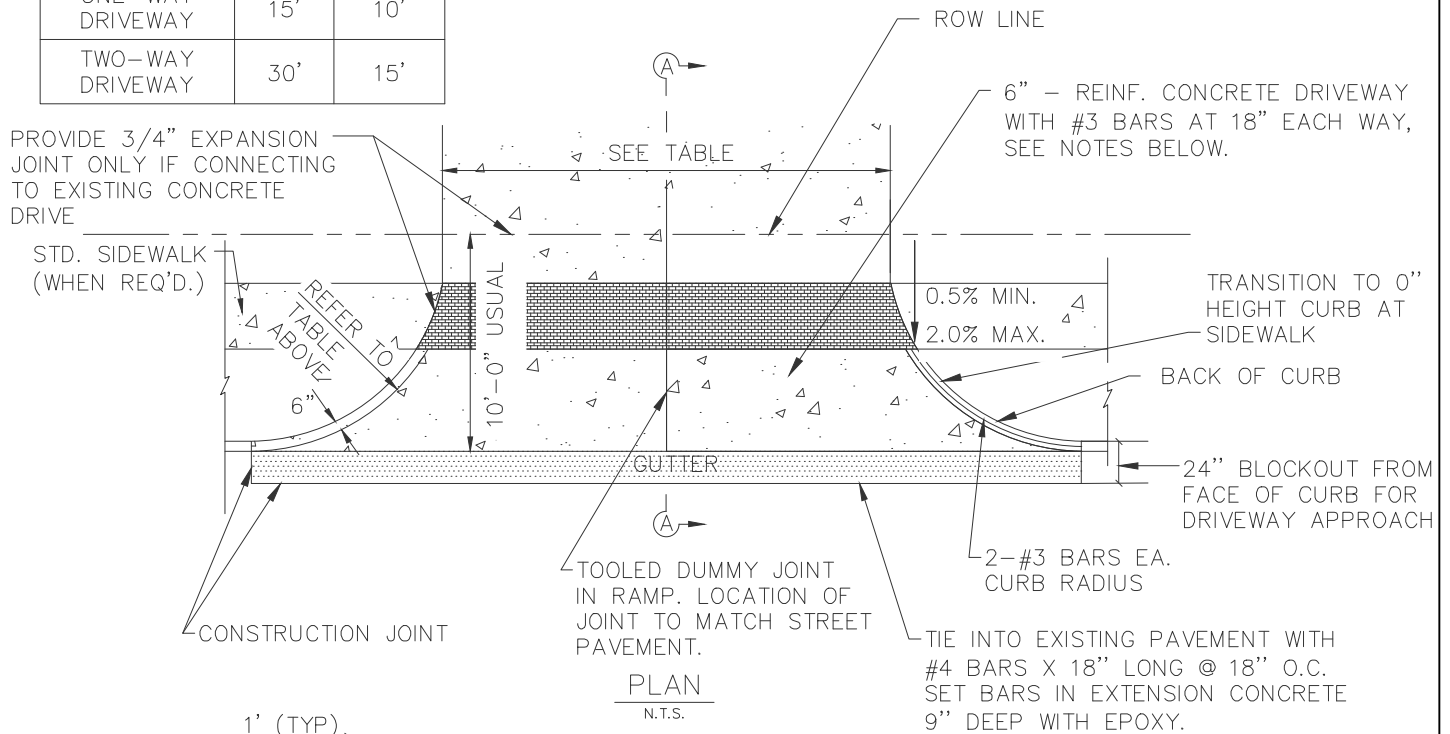

**PAVING CONSTRUCTION DETAILS
COMMERCIAL DRIVE**

REVISION DATE:
2/1/2024

SHEET: P-12