

HAND SWEEPED SAND INTO JOINT, NO GAP (1 PART COLORED PORTLAND CEMENT & 3 PARTS SAND)

PEDESTRIAN PAVERS

SLOPE 2% MAX. TOWARD STREET

1 1/4" GRANITE SAND CONFORMING TO ASTM C33

1/2" BITUMINOUS EXPANSION JOINT MATERIAL. DEPTH OF JOINT MATERIAL SHALL BE SUFFICIENT TO PREVENT CONTACT BETWEEN WALK AND CURB. STOP EXPANSION JOINT AT 3/4" BELOW TOP OF CURB AND SEAL WITH APPROVED CONC. GREY SEALANT.

1-1/4"
2-1/4"
4"

6" - #3 DOWELS EPOXIED 3" INTO PAVEMENT @ 24" O.C.

#3 BARS @ 18" O.C.E.W.

CONC. STREET


SUBGRADE COMPACTED TO 95% STD. PROCTOR DENSITY @ 0%-3% ABOVE OPTIMUM MOISTURE

12" 12" 3" 3"

SECTION A-A

NTS

ARTERIALS 9'-12'
COLLECTORS 9'
LOCALS 5'

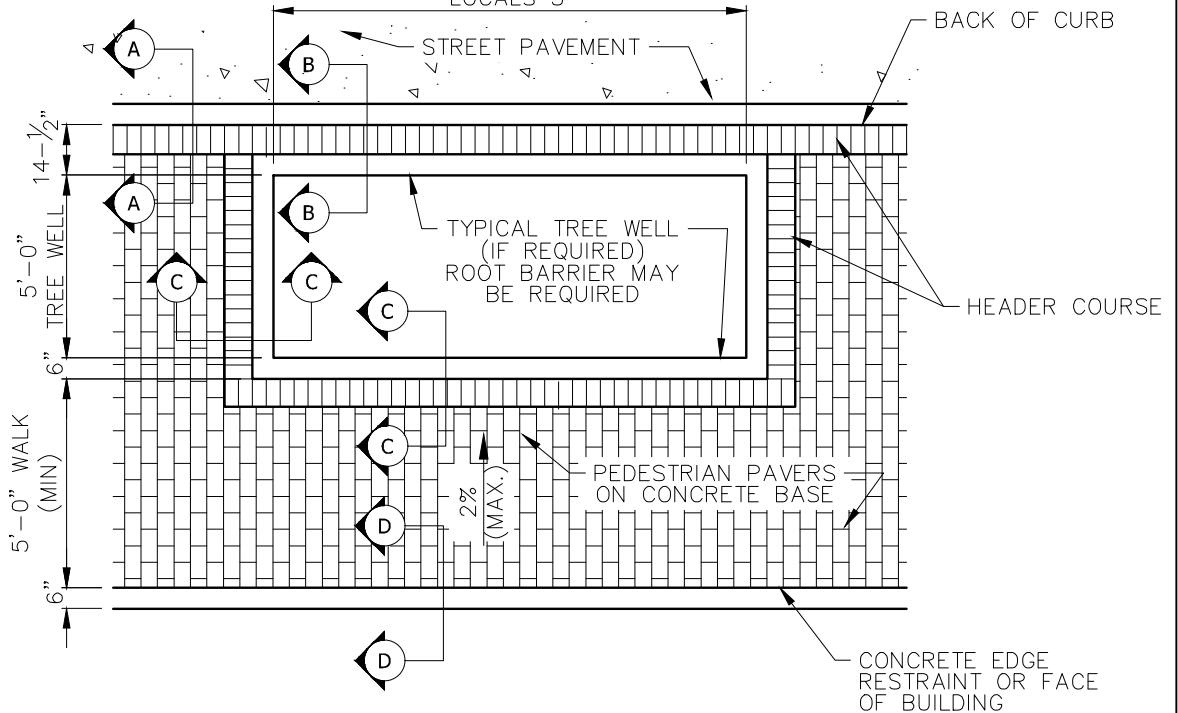

SIDEWALK PLAN: BRICK PAVERS

NTS



PAVING CONSTRUCTION DETAILS
SIDEWALK BRICK PAVERS CONTINUED

REVISION DATE:
2/1/2024

SHEET: P-30